

REESE

You *can* take it with you.

INSTALLATION INSTRUCTIONS

*FORD F-250 SUPER DUTY and
F-350 SUPER DUTY w/ 37" frame*

Product No.

45008


SMALL PARTS
PACKAGE 45225

WARNING: DO NOT LUBRICATE THREADS, BOLT FAILURE MAY OCCUR DUE TO OVER TIGHTENING.
WARNING: DO NOT DRILL OR WELD TO THIS HITCH.

IMPORTANT NOTES
USE ONLY REESE SUPPLIED OR APPROVED BOLTS, LOCKNUTS, AND WASHERS TO INSTALL THIS HITCH

TOOLS REQUIRED

3/4" SOCKET
3/4" WRENCH
TORQUE WRENCH

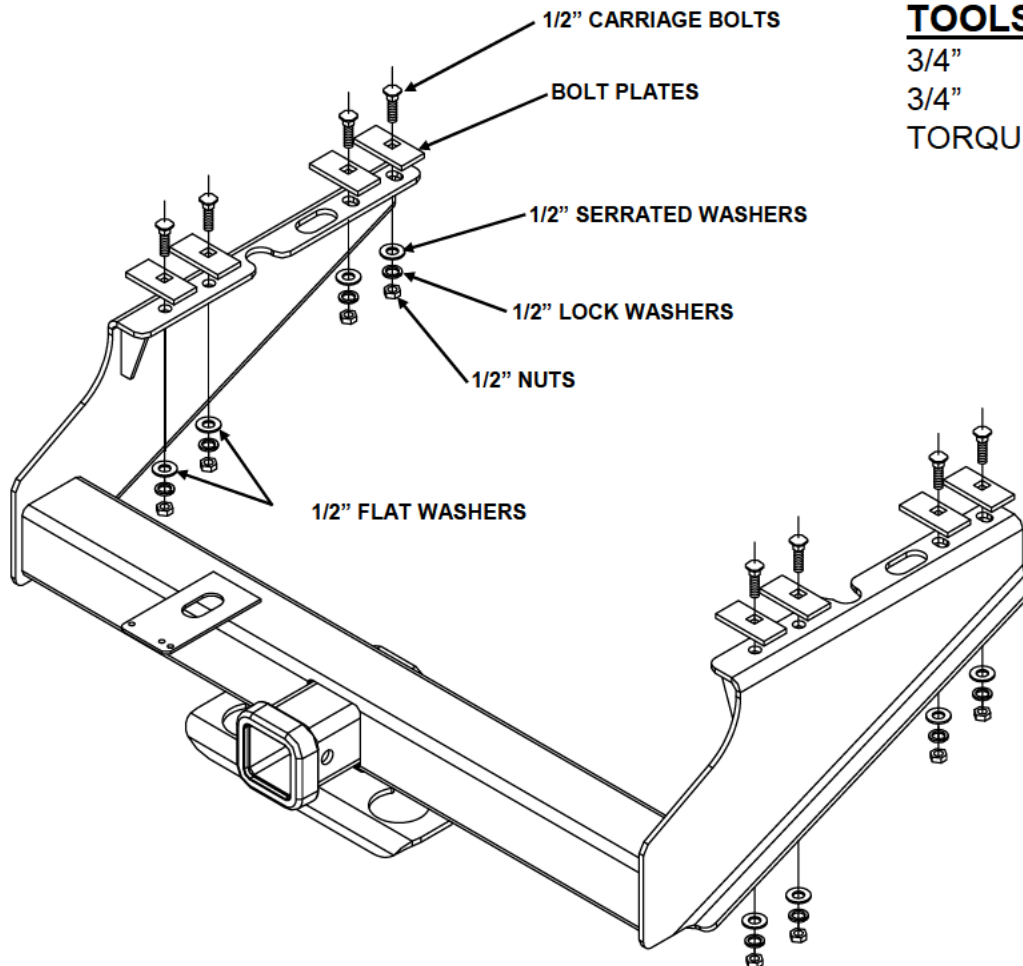

1. Drop the carriage bolts through the bolt plates and install through eight holes in the frame.
2. Hold the hitch up to the frame aligning the hitch with the bolts. Install 1/2" serrated washers, lock washers, and nuts on the four forward bolts and 1/2" flat washers, lock washers, and nuts on the four rearward bolts.
3. Torque all 1/2" nuts to 70 ft*lb. (95 N*M)
4. May be necessary to move spare-tire forward for hitch clearance for vehicles with larger diameter spare-tires.

(OVER)

For Installation Assistance or Technical Help, Call 1-800-758-0869

For Installation Assistance or Technical Help, Call 1-800-758-0869

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATION AND REQUIREMENTS FOR THE STATE OF NEW YORK AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. WEIGHT DISTRIBUTING HITCH RATING IS 14000 LB. (6356 Kg) MAX. GROSS TRAILER WEIGHT AND 1700 LB. (772 Kg) MAX. TONGUE WEIGHT. WEIGHT CARRYING HITCH RATING IS 12000 LB (5448 Kg) MAX GROSS TRAILER WEIGHT AND 1200 LB (545 Kg) MAX TONGUE WEIGHT. CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS.

LIMITED WARRANTY

Reese warrants its Hitches, custom Hitch Receivers, and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and excepted, for the ownership life of the original consumer purchaser. Reese will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to any Reese dealer, Reese Warehouse or return to factory. TRANSPORTATION CHARGES PREPAID, at the address below. THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to the Hitch, Custom Hitch receiver or Sway Control as a result of misuse, abuse, neglect, accident, improper installation, or any use violative of instructions furnished by us, WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. In the event of a problem Reese warrants its Hitches, Custom Hitch Receivers and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and tear excepted, for the ownership life of the original consumer purchaser. with warranty service or performance, you may be able to go to a small claims court, a state court, or a federal district court.

Cequent Towing
47774 Anchor Ct. West
Plymouth, MI 48170