




Application: Application: Aplicación:

Ford Thunderbird | Jaguar S-Type | Lincoln LS

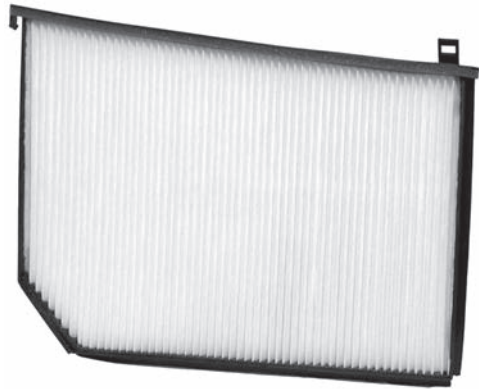

Location of cabin filter:

In front of the windshield on the passenger side of the vehicle under the cowl vent screen.

Tools:

Flat head screwdriver

To replace existing filter:

1. Open hood.
2. Locate the six push type (H011) retainers securing the cowl vent screen on the passenger side of the vehicle. Push in on the center in the retainer and remove. (Fig. 1, 2)
3. Carefully remove the passenger side cowl vent screen. (Fig. 3)
4. Locate the cabin filter and unclip hooks on either side securing filter in place and remove dirty cabin filter. (Fig. 4)
5. Replace with clean cabin filter and reverse steps to complete installation. (Fig. 5)



H011
push type cowl grille
retainer




1



2



3

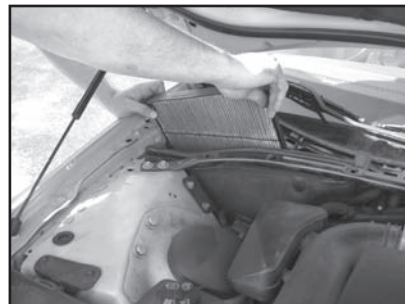

4



5