



Application: Application: Aplicación:

Saturn LS, LW, L



**Location of cabin filter:**

In front of the dash under the cowl vent screen on the passenger side of the vehicle.

**Tools:**

Standard Screwdriver

**To remove existing filter:**


1. Raise Hood. (Fig. 1)
2. Remove sectional rubber cushion by raising and pulling back toward middle of vehicle. (Fig. 2)
3. Using a flat blade screwdriver, gently pry open (using an upward motion) the cowl to reveal the filter housing and element. (Fig. 3,4)
4. Locate and unsnap (outward) the two tabs securing the cabin filter to the housing. (Fig. 5)
5. Remove the dirty filter (Fig. 6) and install a new filter paying close attention to the airflow direction arrows.
6. Snap the tabs securing the filter to the housing inward making sure that the filter is properly secured.
7. Close the cowl cover and snap back into place (ensure that the cowl is secure).
8. Replace sectional rubber cushion
9. Close hood.



1



2

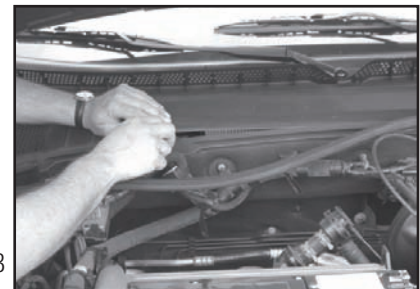

3



4



5



6